


IQMAX[®]

H3



**CROSS FLOW
AIR CURTAIN**

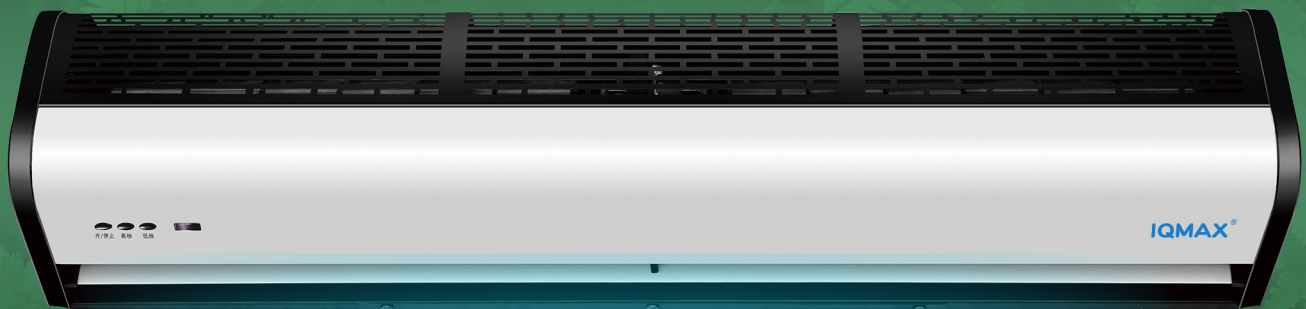

Fresh Air Fresh Life!

Optional:



Metal casing



Adjustable air
deflector



High efficient
motor



Quiet wind
wheel



Remote
control



Magnetic
door

Model H3

Cross Flow



Metal casing



Adjustable air deflector



High efficient motor



Quiet wind wheel

Optional :



Remote control



Magnetic door

Warranty one year for product ,Warranty five years for motor

★ Utility model patent No.: CN201821756562.9

- **Fashionable appearance design:** Applying quadrate hole punching design, fashionable looks, serializing together with H5 and H7.
- **Improved air duct design:** convenient for assembling, bringing powerful, smooth and even air flow, making a great air curtain effect, and the installing high will be roundly 0.3m higher than competitor.
- **Unique segmented splice panel design:** front panel splicing with upper and lower plate, can be multi-matching as: white + black, all black, all white, etc.
- **High efficiency motor:** Adopting self-made motor, powerful, low noise, more reliable.
- **Multi-control ways:** With remote control receiver and manual key design, the operation is more convenient, standard two speeds, three speeds for option, which is suitable for a variety of places.
- **Intelligent magnetic door switch (Optional):** Realize humanized control of door opening and closing, greatly reduce indoor air outflow and save energy.
- **Double voltage (For option):** Motor can be optional for 110V/220V, suitable for some area with double voltage like Taiwan, South America.

Parameters

Model	Voltage/ Frequency (V/Hz)	Input Power (W)	Air Velocity (m/s)	Air Volume (m³/h)	Noise (dB)	Diameter Of Impeller (mm)	Net Weight (KG)	Gross Weight (KG)	Unit Size (mm)	The Installation Height (m)
IM-CMR09	220-240V/50Hz	100	10-11	1550	≤45	100	9.1	10.6	910×178×176	2.3-3
IM-CMR10	220-240V/50Hz	115	10-11	1720	≤45	100	9.8	11.5	1005×178×176	2.3-3
IM-CMR12	220-240V/50Hz	135	10-11	2130	≤46	100	11.5	13.5	1205×178×176	2.3-3
IM-CMR15	220-240V/50Hz	150	10-11	2650	≤48	100	14.3	16.8	1500×178×176	2.3-3
IM-CMR18	220-240V/50Hz	180	10-11	3200	≤50	100	17.5	20.3	1795×178×176	2.3-3
IM-CMR20	220-240V/50Hz	185	10-11	3550	≤52	100	18.8	22.0	2000×178×176	2.3-3

Back diagram



Vertical view

